

alpro

ANSI Electric Strike

AL110



The Alpro AL110 series is an ANSI style security strike complete with stainless steel short or long faceplate for use in metal, timber and some composite door applications.

12/24v Selectable

Stainless Steel Face Plate and Striker

Compact Cast Aluminium Body

35mm overall depth

Deep Jaw

Accepts 13mm latch bolt

Low Current Consumption

200mA - 12v DC continuous ($\pm 15\%$)

100mA - 24v DC continuous ($\pm 15\%$)

Simple Fail Safe/Fail Secure Changeover

Easy Installation

Stick on/peel off template

Monitored and Lipless Versions Available

Weather Resistant - IP56 Protection as Standard

Options

ANSI short or long faceplates

Extension lips to be purchased separately, available in - 15, 25, 50 and 75mm (pre-drilled strike body)

Approvals

EN 61000-6-3 : 2021

EN 61000-4-2 : 2009

EN 61000-4-8 : 2010

EN 61000-4-6 : 2014

Lock Compatibility

Accepts 13mm latch bolt when fitted with 3mm door



6 YEAR GUARANTEE

Ordering Information

Description

- 12/24vDC ANSI Short SS Strike including mounting kit
- 12/24vDC ANSI Short SS Strike including mounting kit
- 12/24vDC ANSI Long SS Strike including mounting kit
- 12/24vDC ANSI Long SS Strike including mounting kit

For monitored version add -M to code e.g. AL111AS-M
 For lipless version add -O to code e.g. AL111AS-O

Function

- Fail Safe / PTL
- Fail Secure / PTO
- Fail Safe / PTL
- Fail Secure / PTO

Code

- AL111AS**
- AL112AS**
- AL111BS**
- AL112BS**

Accessories

- 15mm Extension Lip
- 25mm Extension Lip
- 50mm Extension Lip
- 75mm Extension Lip
- Rectifier Sounder Module
- 13mm Rebate Plate
- Radius Brushed Aluminium Faceplate
- Euro Sashlock Faceplate Non-Handed
- UK Sashlock Faceplate Non-Handed

- ALEX1115**
- ALEX1125**
- ALEX1150**
- ALEX1175**
- IEC-RM1**
- ALS1113**
- AL110RADIUS**
- AL110SLEU**
- AL110SLUK**


Illustrated AL110 ANSI short metal door preparation

(BS) ANSI long faceplate 200 x 35

(AS) ANSI short faceplate 124 x 31


15, 25, 50 & 75mm Extension Lips are available as extras

Note: For detail of installation see instructions/template

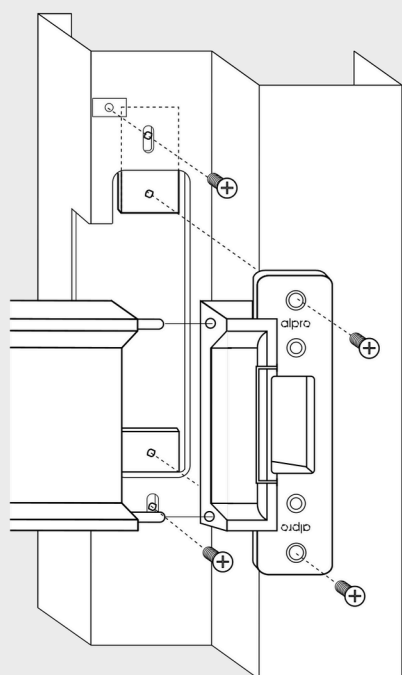

(BS) ANSI Long Faceplate

(AS) ANSI Short Faceplate

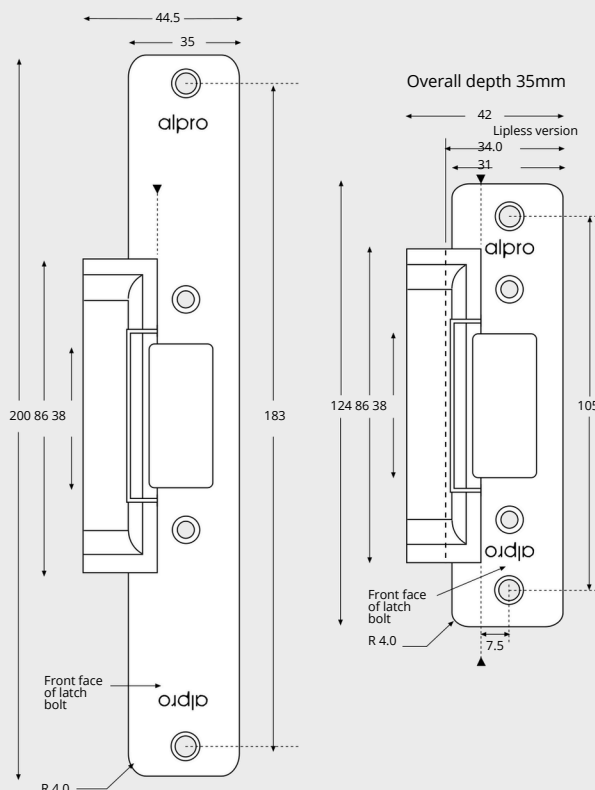

All dimensions are shown in mm.